3050 Spruce Street, St. Louis, MO 63103 USA
Tel: (800) 521-8956 (314) 771-5765 Fax: (800) 325-5052 (314) 771-5757
email: techservice@sial.com sigma-aldrich.com

Product Information

(\pm)-3,4-Methylenedioxymethamphetamine hydrochloride solution, 1.0 mg/mL \pm 5% in methanol drug standard

Catalog Number **M5029** Lot Number 109K8710 Storage Temperature 2–8 °C

CAS RN: 64057-70-1

42542-10-9 (free base)

Synonyms: MDMA hydrochloride, Ecstasy hydrochloride, XTC hydrochloride, $5-(N,\alpha-Dimethyl)$ ethanamine-1,3-benzodioxole

hydrochloride

Product Description

Molecular Formula: C₁₁H₁₅NO₂ · HCl

Molecular Weight: 229.70

DEA Class: Exempt preparation of Class I

Concentration: 1.17 mg (\pm) -3,4-methylenedioxymethamphetamine hydrochloride (equivalent to 0.984 mg of free base)/mL of GC grade methanol, concentration verified by UV.

Expiration Date: October 2012

Precautions and Disclaimer


This product is for R&D use only, not for drug, household, or other uses. Please consult the Material Safety Data Sheet for information regarding hazards and safe handling practices.

Storage/Stability

Store the product at 2–8 °C. If stored at 2–8 °C in an airtight container, protected from light, decomposition of the product is less than 1% in 36 months. After opening, concentration may change due to loss of solvent.


JES, MAM 11/09-1

70 eV Electron Ionization Mass Spectrum

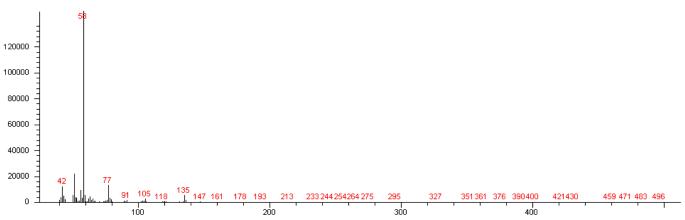

Hewlett-Packard 5890 Series II Gas Chromatograph Hewlett-Packard 5971 Mass Selective Detector Hewlett-Packard G1034C MS ChemStation (HP-DOS series)

FT-IR

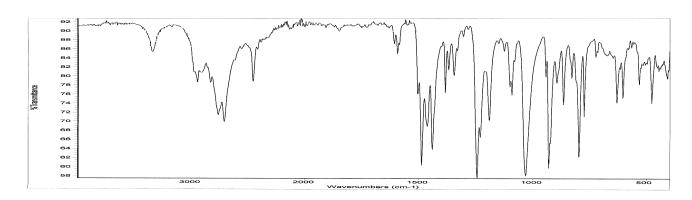

Nicolet 380 FT-IR Thermo Smart Orbit

Ultraviolet Spectrum

Absorbance 0.8145

Solvent 0.2 N Sulfuric acid

Dilution 1:24 (v/v)


Capillary Gas Chromatography


Column Supelco SPB-1 (Catalog Number 24162) I.D. 0.20 mm Length 15 m Film Thickness 0.20 μ m Oven Temperature 50 °C (2 minutes), then


15 °C/minute to 300 °C, hold 11 minutes

Injector Temperature 250 °C, Split **Detector** Hewlett-Packard 5971

Mass Selective Detector (70 eV, 40-500 m/z)

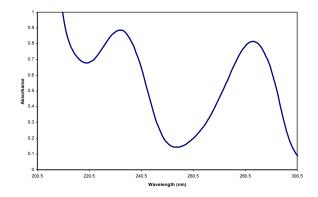



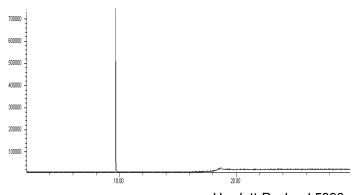

Hewlett-Packard 5890