

Progard® XL-S Pretreatment Pack

(Cat. No. PROGTXLOS1 – Qty 1, PROGTXLOS2 – Qty 2)

General Description

The Progard® XL-S pretreatment packs are intended for use with larger RiOs™ and Elix® water purification systems. The packs are to provide protection and maintain good performance of the reverse osmosis membranes in each of these systems. The pretreatment packs include prefiltration to remove particles, activated carbon to remove chlorine and an anti-scaling agent to minimize the risk of scale formation. In addition, the activated carbon is impregnated with a small level of silver to prevent bacteria growth.

Dimensions (nominal)

Height	528 mm (20.8 in.)
Width	155 mm (6.1 in.)
Depth	79 mm (3.1 in.)

Connections

Progard® XL-S pack must fit securely and leak-free into RiOs™, Elix® and AFS® E systems	
Inlet connection at top of pack	
Outlet connection at top of pack	
Double female O-ring port for inlet and outlet	
11 mm diameter O-rings	

Contents and materials of construction

Housing, end caps and spacer materials are polypropylene or polyethylene	
Thermal-plastic welding (no glues or solvents)	
Media content: refer to diagram	

Flow, pressure and temperature specifications


Pressure	6 bar (85 psi) maximum
Flow rate	4.2 L/min (1.1 gal/min) maximum
Operating temperature	2 to 40°C (35 to 104°F)

Storage

Storage temperature	2 to 40°C (35 to 104°F)
No shelf expiration limit	

Application

Designed for use with RiOs™ and Elix® and AFS® E systems following pretreatment guidelines for selection of pretreatment pack options

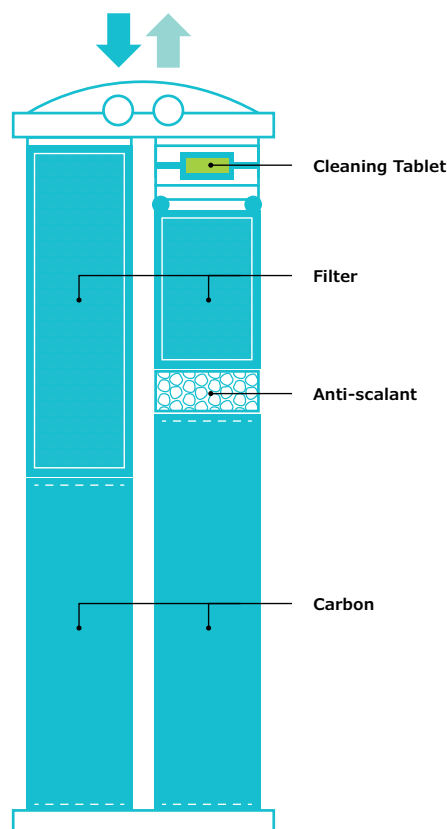

For More Information

Please visit our website

MerckMillipore.com/labwater

Merck KGaA
Frankfurter Strasse 250
64293 Darmstadt
Germany

